


版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.05.19		新版	王洪松
V3.0	21.06.04		键连同轴尺寸21.5公差变更	王洪松

Dimension: (Unit: mm)

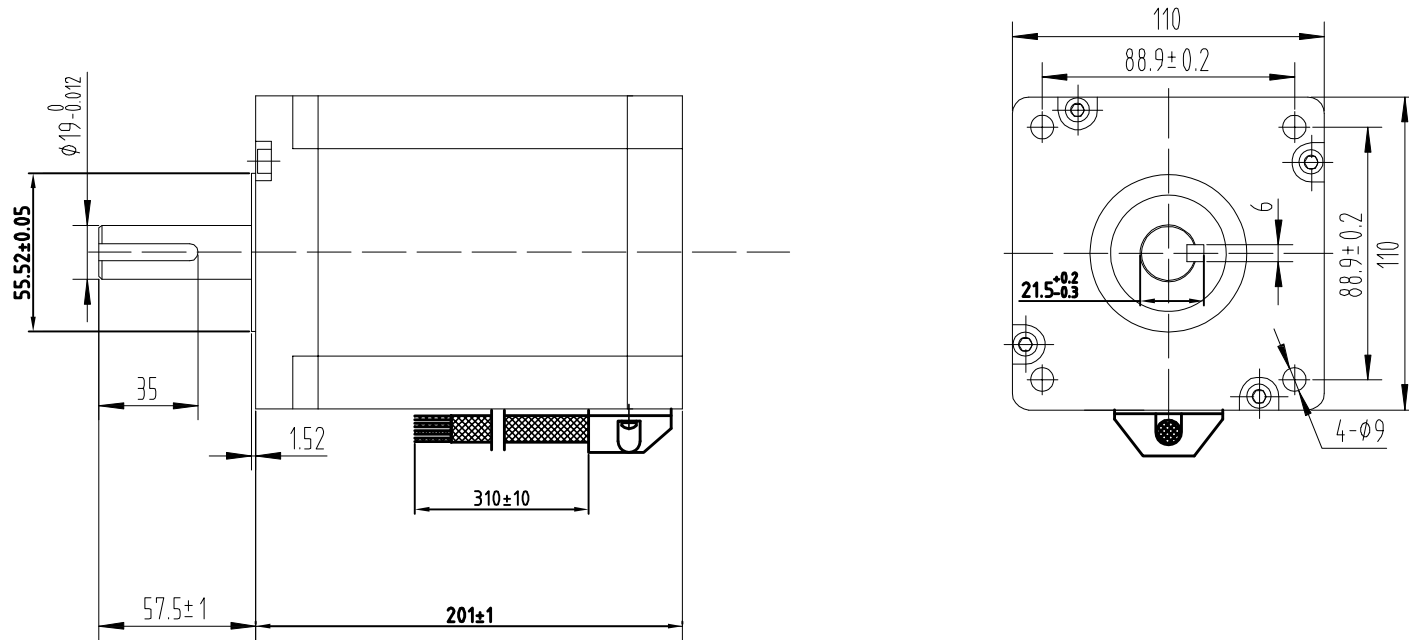


### Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

### Specification

Current/phase	6.5 A
Voltage	3.6V
DC Resistance/phase	1.2 Ω
Inductance/phase	22 mH
Holding torque	28 N·M
Inertia	16.2kg·cm <sup>2</sup>
Weight	11.7 kg

### Motor Connections

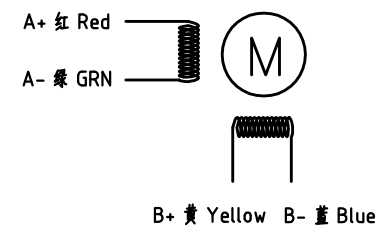

设计 Designed	王洪松	日期 Date	2021.06.02	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	王洪松		2021.06.02	第一角画法 First Angle projection	名称 Title
批准 Approved	王洪松		2021.06.02	版本/版次 A/03	110CM28 MS20
零件编号 Part No.	LS-MT-01-07A			共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO. LS-110CM28 MS20